

Extreme Series Monitors

M10116



Model Number

M10116

Description	6 ch 10.1" Touch Screen Monitor w/rec
Color Available	Black
Product Dimensions	275 x 220 x 104 mm (W x H x D)
Connection Type	Camera Input: 4 pin twist locking GX12 Connector GPS Antenna: SMA Connector
Power Consumption	Max: 1.5A @12V, 18W Standby: 3mA @12V




Pinout from the Monitor side:



Pin1= +12V (Power)
Pin2= GND (Ground)
Pin3= Audio
Pin4= Video

SPECIFICATIONS

Power Supply	9~36V
Input Protection	Reverse Polarity, Short Circuit and Low Voltage Protections
Video Input	6 Camera Inputs (Supports CVBS PAL/NTSC, AHD 720p, 1080p @ 25/30fps)
User Interface	Graphical User Interface (GUI) with Touch Panel Input
Video Display Mode	Multi-View Display Mode (single, 2 /3 /4 /5 /6 split-screen mode)
Trigger	6 Trigger Inputs
Storage	2 Slots x 256GB MicroSD Card
Video Compression	H.264 / H.265
Duration of Recording	Approx. 500MB/hr/ Channel @720p, 250MB/hr/ Channel @D1 * (using H.265)
Recording Fail-Safe	Prevent file/data corruption in case of power interruption
Location Tracking	GPS Antenna
Screen	Resolution: 1024 x 600 IPS Touch Panel
Brightness	400cd/m ²
Contrast Ratio	800:1
Screen Aspect Ratio	16:9
Screen Dimensions	222.7mm (H) x 125.3mm (W) (10.1-inch Diagonal)
Operation Temperature	-20°C~+70°C
Storage Temperature	-30°C~+80°C
Shock Rating	10G

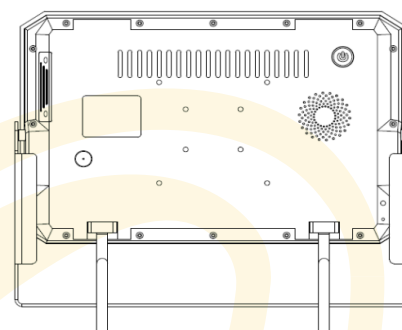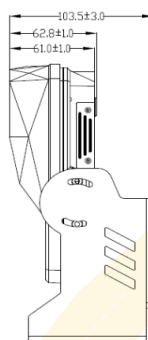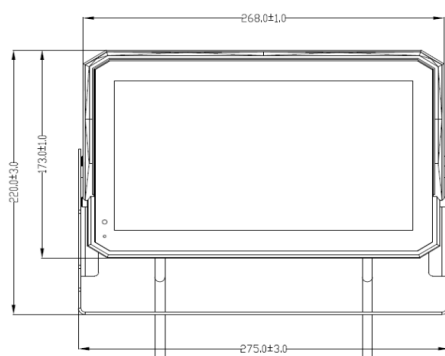

CONVOY TECHNOLOGIES
See Everything

See Clarity See Performance See Durability See Quality *See Everything* See Clarity See Performance See Durability See Quality *See Everything*

www.convoytechnologies.com

Toll Free 888-565-2583